

Datasheet

LuxaLight LED Engine Far Red 735nm Protected (24 Volt, 108 LEDs, 2835, IP64)

LE-24-735-108X2835PLX

Version: 2025-02-26.1

Product description

The LuxaLight Industrial LED Engine is designed as a high-performance component for intensive industrial applications requiring high radiation intensity. With a 735nm deep red wavelength, this LED engine provides an efficient solution for processes that benefit from deep red light, such as plant growth stimulation, tissue regeneration, and more.

This LED engine is a semi-finished product, allowing it to be integrated into custom fixtures or housings depending on your specific requirements. It offers flexibility for use in various industrial, research, and medical applications, where the powerful 735nm wavelength can deliver targeted results. The engine is designed for easy integration into larger systems or custom enclosures.

Key Features:

- **735nm Deep Red Wavelength:** The 735nm deep red wavelength is ideal for applications that require deep red light, such as horticulture, biological research, and certain industrial processes. It is also beneficial for promoting tissue regeneration and therapeutic applications.
- **24V Power Supply:** The LED engine operates on a reliable 24V power supply, ensuring stable and consistent operation, perfect for demanding applications.
- **High Radiation Intensity:** This LED engine delivers high radiation intensity, making it suitable for high-efficiency processes and applications requiring significant light output.
- **Semi-Finished Product:** The LED engine is designed to be integrated into custom systems or housings, providing flexibility for adapting to various industrial, research, or medical setups.
- **Integration with MaNima Pollux Industry Pulsing (Strobing):** The LED engine supports integration with the MaNima Pollux Industry System for pulsing (strobing), significantly increasing radiation intensity. This feature allows for faster reactions and improved efficiency in industrial processes.
- **Real-Time Temperature Monitoring via NTC Sensor:** The integrated NTC sensor ensures continuous temperature measurement and adjustment through the MaNima Pollux Industry System. This helps maintain the optimal operating temperature for maximum radiation output and consistent performance.

Applications:

- **Horticulture & Agriculture:** The 735nm wavelength is highly effective in stimulating plant growth, especially in promoting flowering and fruiting, making it ideal for use in greenhouses and vertical farming environments.
- **Biological Research:** This LED engine is effective for scientific and medical applications requiring deep red light, such as promoting tissue regeneration, enhancing cell cultivation, and conducting photobiomodulation (PBM) therapy.
- **Medical Therapy:** 735nm deep red light is used in phototherapy treatments for skin healing, anti-aging therapies, and muscle recovery, where the light stimulates cells and tissues.
- **Food Industry:** The 735nm wavelength can be used to stimulate growth in food production environments or in the pasteurization process of certain food products requiring exposure to deep red light.
- **Industrial Material Curing (Non-UV):** The deep red light can cure coatings and materials that respond to red wavelengths, offering effective and fast curing processes in industrial settings.
- **Cosmetic Industry:** The LED engine is suitable for use in the cosmetic industry for skin treatments like wrinkle reduction, skin tone improvement, and stimulating collagen production.

Benefits:

- **High Radiation Intensity:** The engine provides high radiation intensity, allowing for faster reactions and increased productivity in applications requiring deep red light.
- **Flexibility in Integration:** As a semi-finished product, the LED engine offers flexibility for integration into custom housings or systems tailored to specific industrial, research, or medical applications.
- **Efficient Performance:** The LED engine provides efficient performance with stable output, making it ideal for environments that require consistent light delivery.
- **Real-Time Temperature Monitoring for Consistent Performance:** The integrated NTC sensor, combined with the MaNima Pollux Industry System, ensures continuous temperature monitoring, helping to prevent overheating and maintain optimal operating conditions for long-term reliability.

Technical specifications

General															
Brand	LuxaLight														
Application	Barcode Scanning Machine Vision														
LED type	2835														
PCB color	White														
Material	Aluminum														
Dimensions	200 × 20 × 2 mm														
Mounting	3M tape VHB4905														
LEDs per piece	108.00														
Lighting															
Wave length	735nm														
Beam angle	120 °														
Measurement results															
PPFD	<table border="1"> <thead> <tr> <th>Value</th> <th>Measuring distance</th> </tr> </thead> <tbody> <tr> <td>165,14 µmol/m²</td> <td>25 mm</td> </tr> <tr> <td>84,5 µmol/m²</td> <td>50 mm</td> </tr> <tr> <td>50,3 µmol/m²</td> <td>75 mm</td> </tr> <tr> <td>34 µmol/m²</td> <td>100 mm</td> </tr> <tr> <td>11,7 µmol/m²</td> <td>200 mm</td> </tr> <tr> <td>6,3 µmol/m²</td> <td>300 mm</td> </tr> </tbody> </table>	Value	Measuring distance	165,14 µmol/m ²	25 mm	84,5 µmol/m ²	50 mm	50,3 µmol/m ²	75 mm	34 µmol/m ²	100 mm	11,7 µmol/m ²	200 mm	6,3 µmol/m ²	300 mm
	Value	Measuring distance													
	165,14 µmol/m ²	25 mm													
	84,5 µmol/m ²	50 mm													
	50,3 µmol/m ²	75 mm													
	34 µmol/m ²	100 mm													
	11,7 µmol/m ²	200 mm													
6,3 µmol/m ²	300 mm														
Irradiance	<table border="1"> <thead> <tr> <th>Value</th> <th>Measuring distance</th> </tr> </thead> <tbody> <tr> <td>597 W/m²</td> <td>25 mm</td> </tr> <tr> <td>280 W/m²</td> <td>50 mm</td> </tr> <tr> <td>165 W/m²</td> <td>75 mm</td> </tr> <tr> <td>113 W/m²</td> <td>100 mm</td> </tr> <tr> <td>38,9 W/m²</td> <td>200 mm</td> </tr> <tr> <td>20,9 W/m²</td> <td>300 mm</td> </tr> </tbody> </table>	Value	Measuring distance	597 W/m ²	25 mm	280 W/m ²	50 mm	165 W/m ²	75 mm	113 W/m ²	100 mm	38,9 W/m ²	200 mm	20,9 W/m ²	300 mm
	Value	Measuring distance													
	597 W/m ²	25 mm													
	280 W/m ²	50 mm													
	165 W/m ²	75 mm													
	113 W/m ²	100 mm													
	38,9 W/m ²	200 mm													
20,9 W/m ²	300 mm														
Electronics															
Working voltage	24V														
Current per piece	1.25 A / piece														
Power consumption per piece	30.00 W / piece														
PCB material	Aluminium														
Environmental															
Operating temperature	-20 ~ +60 °C														
Storage temperature	-40 ~ +80 °C														
IP class	IP 64														

Directives - standards - certificates


Directives

RoHS
CE

Safety standards

EN60598-1
EN62031
IEC62471

Measurement results

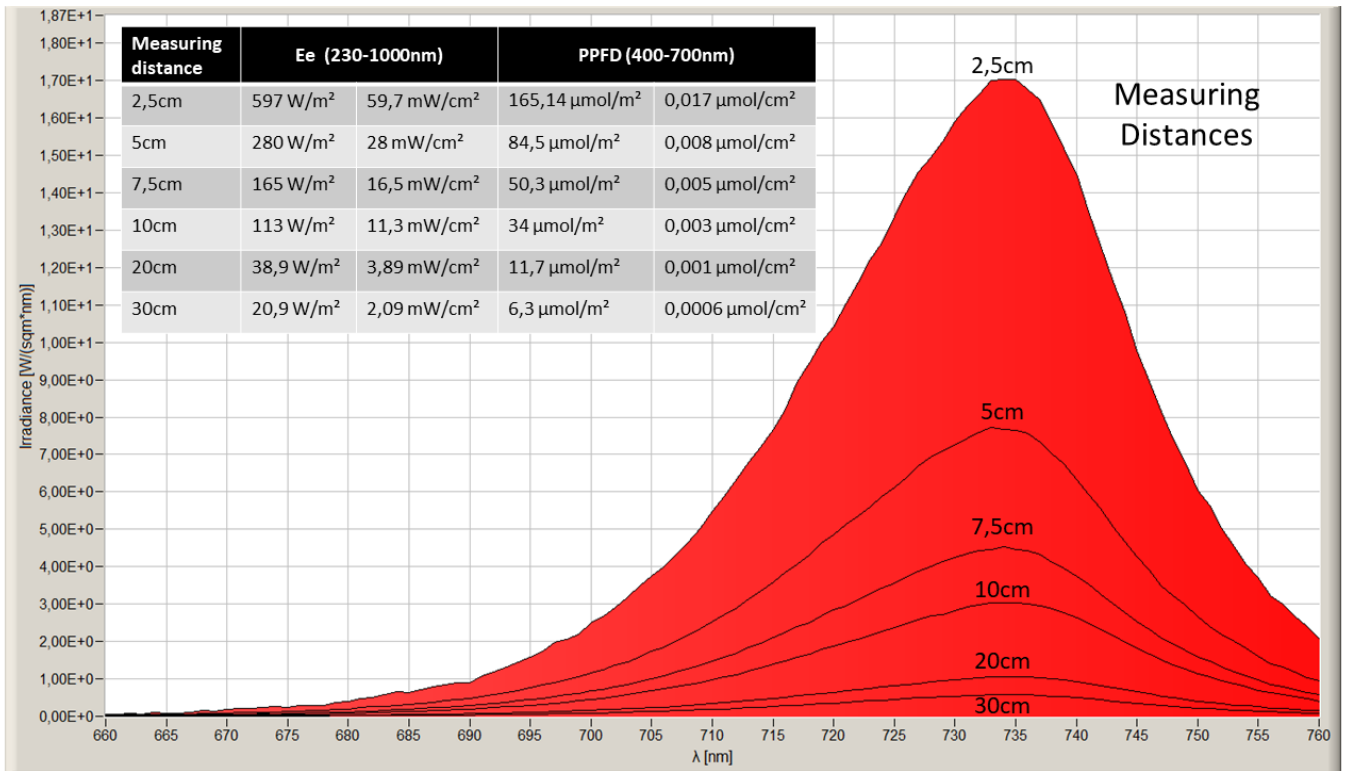

While LuxaLight has made every reasonable effort to ensure the accuracy of the information in this brochure, LuxaLight does not guarantee that it is error - free, nor does LuxaLight make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. LuxaLight reserves the right to make any adjustments to the information contained herein at any time without notice. LuxaLight expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalogue are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult LuxaLight for the latest dimensions and design specifications.