

# Datasheet

## LuxaLight Pixel LED-strip TM1814 Digital RGBWW High Power Protected (24 Volt, 72 LEDs, 5050, IP64)

**LS24RGBWW72TM1814PLX**

**Version: 2025-02-28.3**

## Product description

This **LuxaLight** professional digital RGBW LED strip is designed for applications where flexible, customized lighting is required, offering high control over each individual LED pixel. The strip consists of **12 segments**, each equipped with **6 RGBW LEDs** (72 LEDs total). It utilizes the **TM1814 IC** for advanced control and color management, allowing precise color adjustments and brightness control. The LED strip has an **IP64 rating**, making it suitable for both indoor and outdoor applications, with protection against dust and water splashes from any direction. The **IC High PWM rate** allows for smooth pixel filming with cameras up to **34fps**, ensuring clear and accurate visual performance.

### LED Strip Configuration:

- **Voltage:** 24V
- **Number of segments:** 12
- **Number of LEDs per segment:** 6 RGBW LEDs
- **Total LEDs on the strip:** 72 RGBW LEDs (12 segments x 6 LEDs per segment)
- **Adhesive:** The strip is equipped with **4905 VHB (Very High Bond)** tape, ensuring strong and durable adhesion to various surfaces.
- **PCB thickness:** The PCB has a thickness of **3 oz/ft<sup>2</sup>**, providing robust support and efficient heat dissipation.
- **IP Rating:** **IP64**, suitable for both **indoor and outdoor applications** with protection against dust and water splashes.

### TM1814 IC

The LED strip uses the **TM1814 IC** for each LED segment. The **TM1814** is an advanced controller that provides PWM dimming (pulse width modulation) for the RGBW LEDs, allowing for very smooth and precise control over the color range and brightness.

### Key Features of the TM1814 IC:

- **Pixel Addressing:** Each segment can be controlled individually for precise color and brightness settings.
- **Color Management:** Supports **RGBW LEDs**, ensuring optimized color rendering and providing enhanced flexibility for color temperature control.
- **Communication:** The IC uses a serial data interface, passing data from the first to the last IC, which enables the integration of long chains of LED strips.
- **Stability and Performance:** Designed to operate with a wide voltage range, ensuring stability under various environmental conditions.
- **High PWM Rate (1000Hz):** The IC's high PWM rate allows for smooth pixel filming with cameras up to **34fps**, providing clear and precise video recording of the LED strip.
- **Data Transfer Rate (800kbps):** Supports a data transfer rate of **800kbps**, ensuring fast and efficient communication between ICs in the strip.


## Technical specifications

General									
Brand	LuxaLight								
LEDs / meter	72								
LEDs per pixel	6								
LED type	5050								
Length per reel	10 m								
Length per segment	83.33 mm								
LED strip width	12.00 mm								
LED strip thickness	4.00 mm								
PCB color	White								
Mantle material	Silicon								
Warranty	2 years								
Lifetime	50000 hours								
Lighting									
Color temperature warm white	2600 - 2900 K								
CRI	≥ 80								
Luminous Flux	1395 lm								
Luminous flux red	240 lm								
Luminous flux green	348 lm								
Luminous flux blue	222 lm								
Luminous flux warm white	585 lm								
Wave length Red	620~630 nm								
Wave length Green	510~525 nm								
Wave length Blue	455~470 nm								
Beam angle	120 °								
Electronics									
Working voltage	24V								
Current / meter	0.80 A / meter								
Power consumption per meter	19.20 W / meter								
PCB material	Copper								
Pinout	<table border="1"> <thead> <tr> <th>Symbol</th> <th>Function</th> </tr> </thead> <tbody> <tr> <td>V+</td> <td>V+</td> </tr> <tr> <td>GND</td> <td>Ground</td> </tr> <tr> <td>D1</td> <td>Data in</td> </tr> </tbody> </table>	Symbol	Function	V+	V+	GND	Ground	D1	Data in
Symbol	Function								
V+	V+								
GND	Ground								
D1	Data in								
Control									
Number of channels	4								
IC type	TM1814								


Environmental	
Operating temperature	-20 ~ +60 °C
Storage temperature	-40 ~ +80 °C
IP class	IP 64
Directives - standards - certificates	
Directives	RoHS CE
Safety standards	EN60598-1 EN62031 IEC62471

## Measurement results


### RED

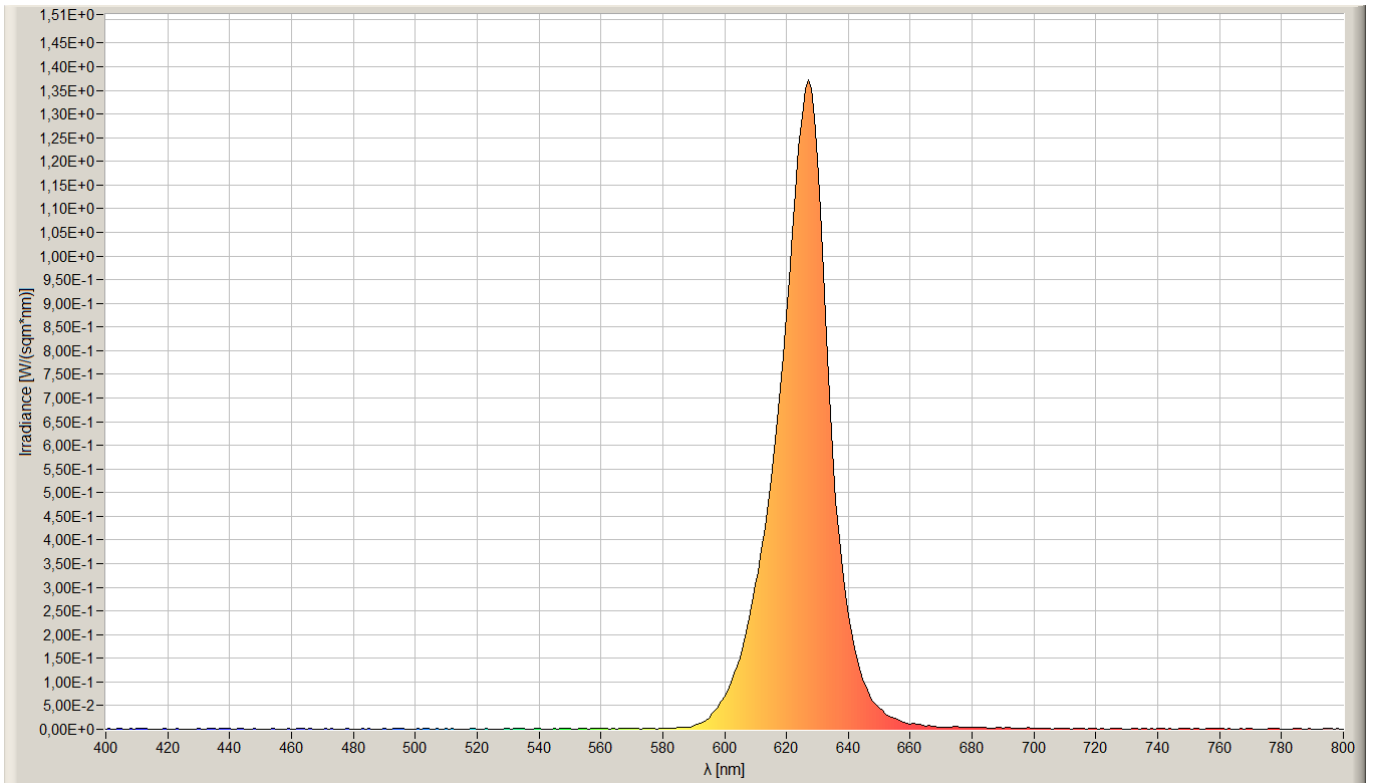


## GREEN

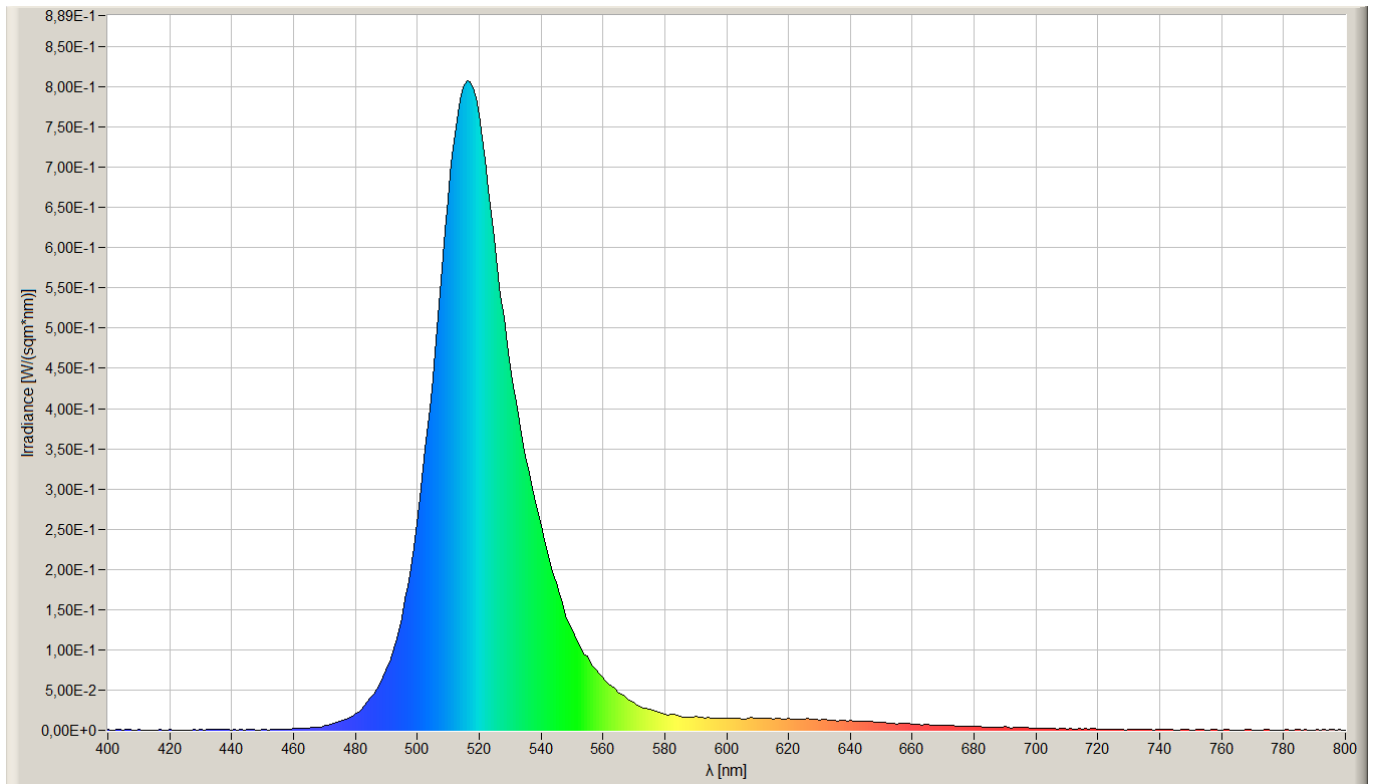

## BLUE

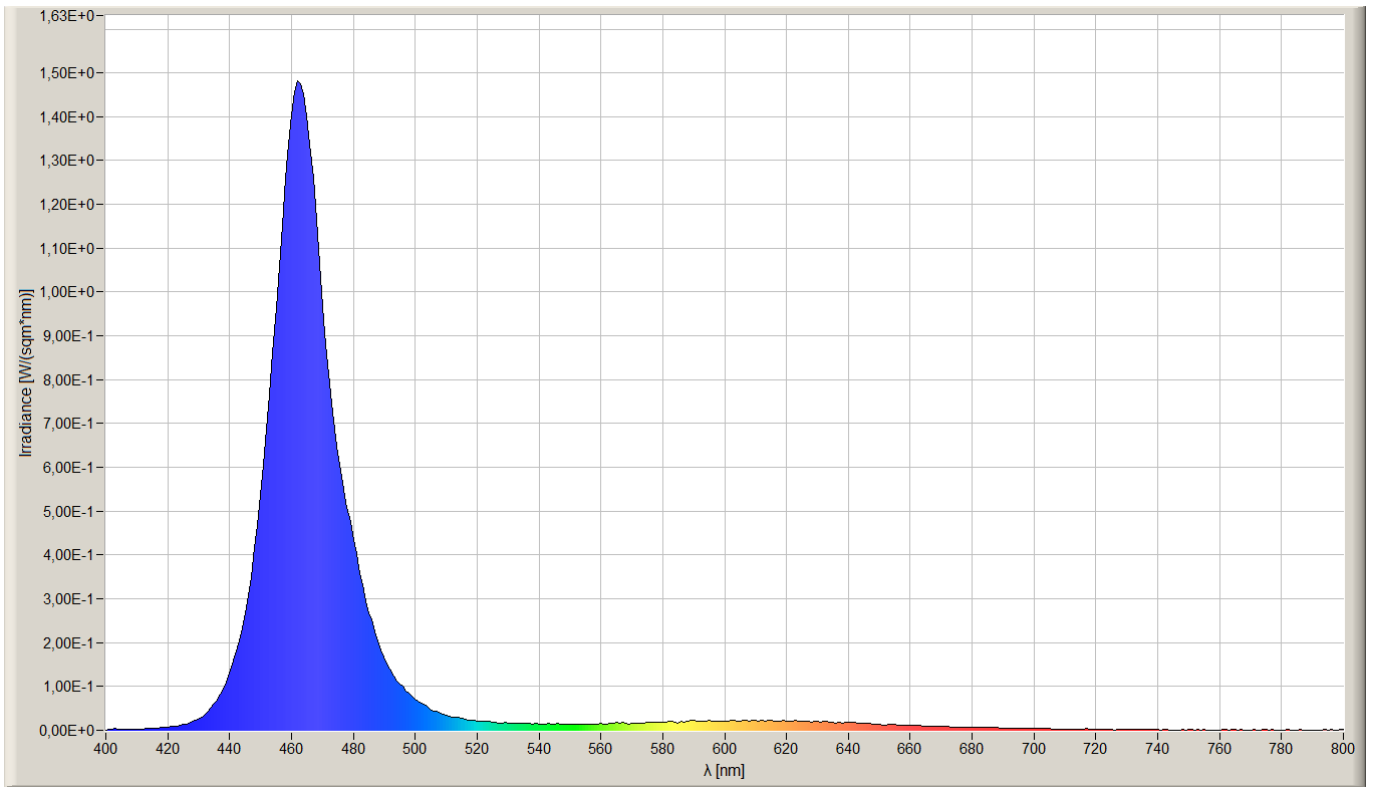

## WARM WHITE

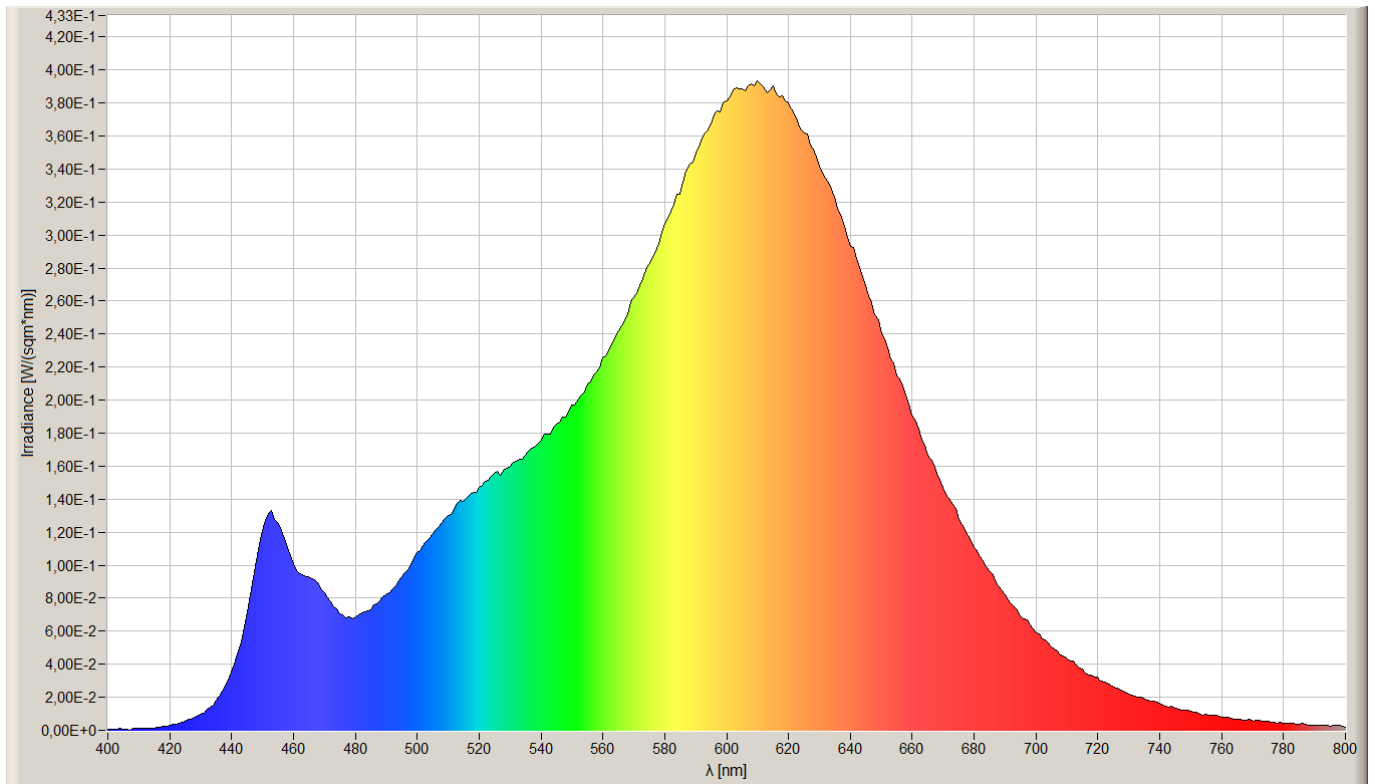



While LuxaLight has made every reasonable effort to ensure the accuracy of the information in this brochure, LuxaLight does not guarantee that it is error - free, nor does LuxaLight make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. LuxaLight reserves the right to make any adjustments to the information contained herein at any time without notice. LuxaLight expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalogue are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult LuxaLight for the latest dimensions and design specifications.