

Datasheet

Zirqle UV LED-strip 365nm Protected (24 Volt, 240 LEDs, 2835, IP64)

LS24UV240X2835PZQ

Version: 2025-02-28.1

Product description

The **Zirqle Industrial 365nm LED Strip** provides advanced UV-A lighting for industrial applications with a **365nm wavelength**. This makes the LED strip ideal for applications such as curing, sterilization, reactor processes, inspection, and machine vision. With **240 LEDs**, the strip delivers an impressive **output of 129 W/m² at a distance of 2.5 cm**, ensuring powerful and reliable illumination perfect for processes that require intense UV-A energy.

Designed with **IP64-rated protection**, the LED strip is resistant to dust, moisture, and other environmental contaminants, making it highly reliable in demanding and rugged industrial environments. Its durable design makes this strip ideal for applications in curing, sterilization, and reactor processes.

Key Features:

- **365nm Wavelength:** Delivers powerful UV-A radiation, perfect for applications such as curing, sterilization, reactor processes, and machine vision.
- **240 High-Performance LEDs:** Ensures a strong, consistent UV-A output, ideal for applications requiring reliable and intense UV-A energy.
- **Radiation Output of 129 W/m² at 2.5 cm Distance:** Provides a powerful **129 W/m²** output at **2.5 cm distance**, perfect for driving industrial processes that require maximum efficiency.
- **IP64 Protection:** The LED strip is **IP64-rated**, making it resistant to dust and water, ideal for use in harsh industrial environments.
- **Energy-Efficient:** Designed to be energy-efficient while still delivering excellent performance for UV-related applications.
- **PCB thickness:** The PCB has a thickness of **3 oz/ft²**, providing robust support and efficient heat dissipation.
- **Durable and Reliable:** The robust design ensures the strip is suitable for continuous operation in heavy industrial environments.

Applications:

- **UV Curing:** The Zirqle LED strip is perfect for curing inks, adhesives, coatings, and other materials in various industrial manufacturing processes.
- **Sterilization:** Ideal for surface sterilization in medical and laboratory environments, where a powerful UV-A light source is needed for effective disinfection.
- **Reactor Processes:** The **365nm UV-A output** is perfect for photochemical processes in UV reactors, such as those used in wastewater treatment, chemical synthesis, or polymerization processes.
- **Fluorescence Detection:** Suitable for research applications and quality control, where UV light is needed for fluorescence-based imaging and detection.
- **Inspection Systems:** The LED strip provides the perfect solution for machine vision systems, using UV illumination to inspect materials, surfaces, or products in detail.
- **Coating and Printing Industry:** Ideal for applications in the coating and printing industries, where UV-based curing processes are essential.

Benefits:

- **High Radiation Output:** The **129 W/m² radiation output at 2.5 cm** provides a powerful and efficient UV-A energy source, ideal for industrial applications requiring precise and intense UV radiation.
- **Robust and Durable:** The **IP64 design** ensures the strip can withstand harsh environments, making it reliable for industrial processes.
- **Flexible and Customizable:** The flexible LED strip is suitable for installation in various environments and can be customized to meet specific application needs.
- **Energy-Efficient:** This LED strip delivers high performance with low power consumption, making it a cost-effective solution for UV-based applications.
- **Long-Lasting Reliability:** The robust construction ensures the strip is reliable for long-term use, even in continuous operation.

Technical specifications

General

| | |
|---------------------|---|
| Brand | Zirqle |
| Application | Curing & Aging Machine Vision UV Inspection |
| LEDs / meter | 240 |
| LED type | 2835 |
| Length per reel | 5 m |
| Length per segment | 25 mm |
| LED strip width | 10.00 mm |
| LED strip thickness | 4.00 mm |
| PCB color | White |
| Mounting | 3M tape VHB4905 |

Measurement results

| | | |
|---|-------|----------------|
| Peak irradiance (Object size: 1 piece) | | 24V |
| | 2.5cm | 9.77583 W/sqm |
| | 5cm | 3.50772 W/sqm |
| | 7.5cm | 2.36011 W/sqm |
| | 10cm | 1.47214 W/sqm |
| | 20cm | 0.465732 W/sqm |
| | 30cm | 0.230312 W/sqm |

| | | |
|--|-------|-------------|
| Total irradiance (Object size: 1 piece) | | 24V |
| | 2.5cm | 129.8 W/sqm |
| | 5cm | 45.65 W/sqm |
| | 7.5cm | 30.8 W/sqm |
| | 10cm | 19.19 W/sqm |
| | 20cm | 6.007 W/sqm |
| | 30cm | 2.99 W/sqm |

Electronics

| Working voltage | 24V | | | | | | |
|-----------------------------|---|--------|----------|----|----|-----|--------|
| Current / meter | 1.00 A / meter | | | | | | |
| Power consumption per meter | 24.00 W / meter | | | | | | |
| PCB material | Copper | | | | | | |
| Pinout | <table border="1"> <thead> <tr> <th>Symbol</th> <th>Function</th> </tr> </thead> <tbody> <tr> <td>V+</td> <td>V+</td> </tr> <tr> <td>GND</td> <td>Ground</td> </tr> </tbody> </table> | Symbol | Function | V+ | V+ | GND | Ground |
| Symbol | Function | | | | | | |
| V+ | V+ | | | | | | |
| GND | Ground | | | | | | |

Environmental

| | |
|-----------------------|--------------|
| Operating temperature | -20 ~ +60 °C |
| Storage temperature | -40 ~ +80 °C |

IP class IP 64

Directives - standards - certificates

Directives RoHS
CE


Safety standards EN60598-1
EN62031
IEC62471

Measurement results

irradiance - 315-405-uv-a (24V)



cie1931

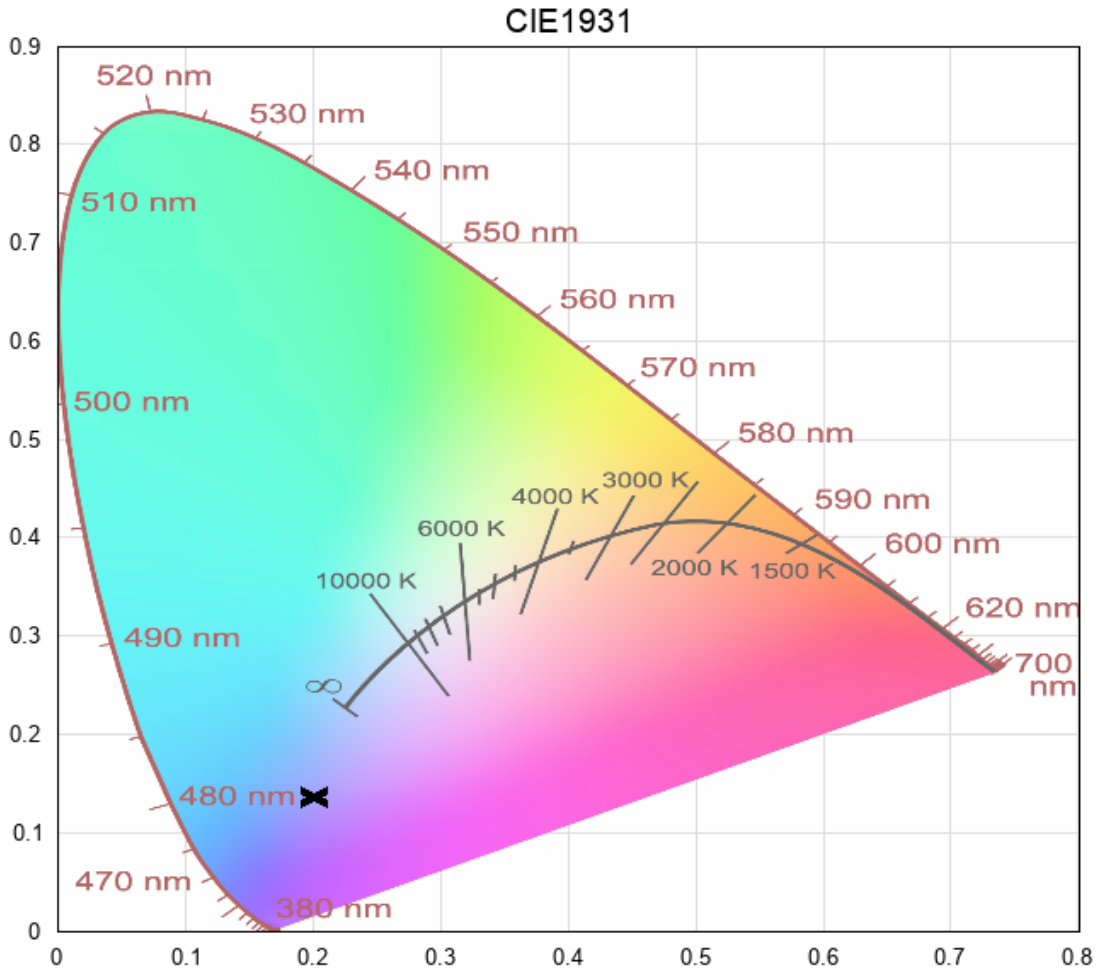

While LuxaLight has made every reasonable effort to ensure the accuracy of the information in this brochure, LuxaLight does not guarantee that it is error - free, nor does LuxaLight make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. LuxaLight reserves the right to make any adjustments to the information contained herein at any time without notice. LuxaLight expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalogue are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult LuxaLight for the latest dimensions and design specifications.