

Datasheet

LuxaLight Industrial LED Fixture Opaline cover Neutral White 4200k 24.2x16mm (24 Volt, 2835, IP64)

LF-24-4200k-24.2X16-OC

Version: 2025-03-28.1

Product description

The **LuxaLight Industrial LED Engine (4200K)** is a high-quality fixture, specially designed for applications that require high light output, precision, and excellent color rendering. The fixture is made from durable aluminum, which not only ensures a robust and reliable construction but also provides excellent *heat management* performance. The design is optimized to prevent overheating and maximize efficiency. The **opal cover** ensures even light distribution, making it ideal for applications where broad light coverage is essential. This makes the unit highly suitable for environments where uniform light spread is crucial.

Key Features:

- **4200K Color Temperature:** The neutral white light at 4200K provides a balanced spectrum, with a strong focus on the 650 nm and 675 nm wavelengths for red light, essential for photosynthesis and plant growth. The LED engine also has a high peak at 450 nm, ideal for promoting chlorophyll production and other biological processes.
- **High PAR Flux (2726 $\mu\text{mol}/\text{m}^2/\text{s}$ at 5 cm):** The LED engine delivers high light intensity in the form of PAR, ideal for promoting photosynthesis and plant growth. This makes it an excellent choice for horticulture and other applications requiring intense light.
- **Aluminum Fixture for Optimal Heat Management:** The fixture is made from high-quality aluminum, ensuring efficient heat dissipation and optimizing the performance of the LED engine. This helps prevent overheating, ensuring the product operates at its best at all times.
- **Opal Cover for Light Distribution:** The opal cover ensures soft, even light distribution, making it ideal for applications where broad light coverage is required, such as growing environments where even lighting throughout the space is needed.
- **Pulse Modes for Dynamic Light Management:** The **Pulse Modes**, developed for the **Pollux industry**, provide the ability to adjust light intensity in different stages. This makes it possible to tailor the light cycle to the specific needs of the application, optimizing photosynthesis and plant growth.
- **Easy Integration:** The LED engine is designed for easy integration into existing systems or enclosures, providing flexibility for a wide range of horticultural and light-related applications.
- **Real-Time Temperature Monitoring via NTC Sensor:** The integrated NTC sensor continuously measures and adjusts temperature, maintaining optimal operating conditions. This prevents overheating and ensures the LED engine always performs at its best, maximizing output for consistent and long-lasting results.

Applications:

- **Horticulture and Plant Lighting:** The 4200K color temperature and high PAR flux make this LED engine ideal for horticultural applications, where a broad spectrum of light is necessary to promote photosynthesis, with a strong focus on 650 nm and 675 nm for red light and a peak at 450 nm for blue light. The opal cover ensures even light distribution, making it ideal for larger growing spaces or applications requiring broad light coverage.
- **Plant Research and Growth Optimization:** With its balanced light spectrum, including specific wavelengths of 650 nm, 675 nm, and 450 nm, the LED engine is ideal for scientific research on plant growth, photosynthesis, and other biological processes influenced by light intensity and quality.
- **Growing Facilities and Vertical Farming:** The LED engine provides powerful lighting for controlled growing environments in greenhouses, vertical farming, and other indoor growing applications, where specific light spectrums and high PAR flux are essential for maximum yield and plant health. The opal cover aids in even lighting in such environments.
- **Plant and Product Quality Control:** The LED engine is also suitable for quality control of plants, crops, or other biological products in agriculture and horticulture, providing consistent lighting that accurately simulates growth conditions.

Benefits:

- **Full Spectrum with High Peaks at 450 nm and Red Light (650 nm & 675 nm):** The extensive light spectrum, with specific wavelengths for blue light (450 nm) and red light (650 nm & 675 nm), offers powerful lighting for photosynthesis and plant growth.
- **High PAR Flux:** The high PAR flux of 2726 $\mu\text{mol}/\text{m}^2/\text{s}$ at 5 cm ensures sufficient light intensity, essential for promoting healthy plant growth, especially in commercial growing environments.
- **Integration Flexibility:** The LED engine can be easily integrated into existing systems or enclosures, providing flexibility for applications in greenhouses, vertical farming, and other horticulture-related setups.
- **Efficient Performance:** The LED engine provides reliable and efficient performance with consistent light output, making it ideal for intensive growth applications such as horticulture, where long-lasting and dependable lighting is required.

Technical specifications

General																	
Brand	LuxaLight																
Application	Food Inspection (Agro-Food) Hyper - spectral Imaging Line Scan Cameras Machine Vision																
LED type	2835																
Material	Aluminum																
Dimensions	220 × 24,2 × 16 mm																
Mounting	Surface mounted																
Cover type	PMMA opal																
LEDs per piece	108.00																
Lighting																	
Color temperature	4200 K																
Beam angle	120 °																
Measurement results																	
PPFD	<table border="1"> <thead> <tr> <th>Value</th> <th>Measuring distance</th> </tr> </thead> <tbody> <tr> <td>2470 µmol/m²</td> <td>50 mm</td> </tr> <tr> <td>1342 µmol/m²</td> <td>75 mm</td> </tr> <tr> <td>836 µmol/m²</td> <td>100 mm</td> </tr> <tr> <td>266 µmol/m²</td> <td>200 mm</td> </tr> <tr> <td>134 µmol/m²</td> <td>300 mm</td> </tr> <tr> <td>88,8 µmol/m²</td> <td>400 mm</td> </tr> <tr> <td>57,8 µmol/m²</td> <td>600 mm</td> </tr> </tbody> </table>	Value	Measuring distance	2470 µmol/m ²	50 mm	1342 µmol/m ²	75 mm	836 µmol/m ²	100 mm	266 µmol/m ²	200 mm	134 µmol/m ²	300 mm	88,8 µmol/m ²	400 mm	57,8 µmol/m ²	600 mm
	Value	Measuring distance															
	2470 µmol/m ²	50 mm															
	1342 µmol/m ²	75 mm															
	836 µmol/m ²	100 mm															
	266 µmol/m ²	200 mm															
	134 µmol/m ²	300 mm															
	88,8 µmol/m ²	400 mm															
57,8 µmol/m ²	600 mm																
Irradiance	<table border="1"> <thead> <tr> <th>Value</th> <th>Measuring distance</th> </tr> </thead> <tbody> <tr> <td>555 W/m²</td> <td>50 mm</td> </tr> <tr> <td>302 W/m²</td> <td>75 mm</td> </tr> <tr> <td>188 W/m²</td> <td>100 mm</td> </tr> <tr> <td>60 W/m²</td> <td>200 mm</td> </tr> <tr> <td>30 W/m²</td> <td>300 mm</td> </tr> <tr> <td>20 W/m²</td> <td>400 mm</td> </tr> <tr> <td>13 W/m²</td> <td>600 mm</td> </tr> </tbody> </table>	Value	Measuring distance	555 W/m ²	50 mm	302 W/m ²	75 mm	188 W/m ²	100 mm	60 W/m ²	200 mm	30 W/m ²	300 mm	20 W/m ²	400 mm	13 W/m ²	600 mm
	Value	Measuring distance															
	555 W/m ²	50 mm															
	302 W/m ²	75 mm															
	188 W/m ²	100 mm															
	60 W/m ²	200 mm															
	30 W/m ²	300 mm															
	20 W/m ²	400 mm															
13 W/m ²	600 mm																

Illuminance

Value	Measuring distance
160 klux	50 mm
87 klux	75 mm
54 klux	100 mm
17 klux	200 mm
8,7 klux	300 mm
5,8 klux	400 mm
3,8 klux	600 mm

- By combining Pulse Mode with Real-Time Monitoring, the efficiency of LED systems can be increased, resulting in higher output.
- We have the expertise and equipment to perform measurements tailored to the specific requirements of the application.

Electronics

Working voltage	24V
Current per piece	1.25 A / piece
Power consumption per piece	30.00 W / piece
PCB material	Aluminium

Pinout

Symbol	Function
V+	V+
GND	Ground
NTC	NTC sensor
NTC_GND	NTC ground

NTC parameters	Resistance: 5000 Ohm Beta value: 3950
----------------	--



Environmental

Operating temperature	-20 ~ +60 °C
Storage temperature	-40 ~ +80 °C
IP class	IP 64

Directives - standards - certificates

Directives	RoHS CE
Safety standards	EN60598-1 EN62031 IEC62471

Measurement results

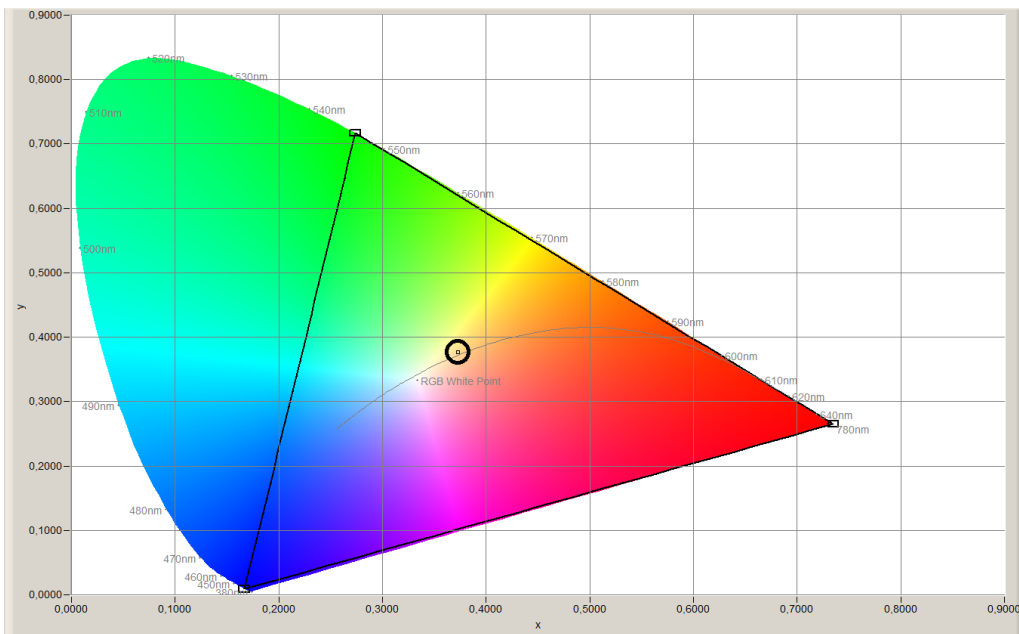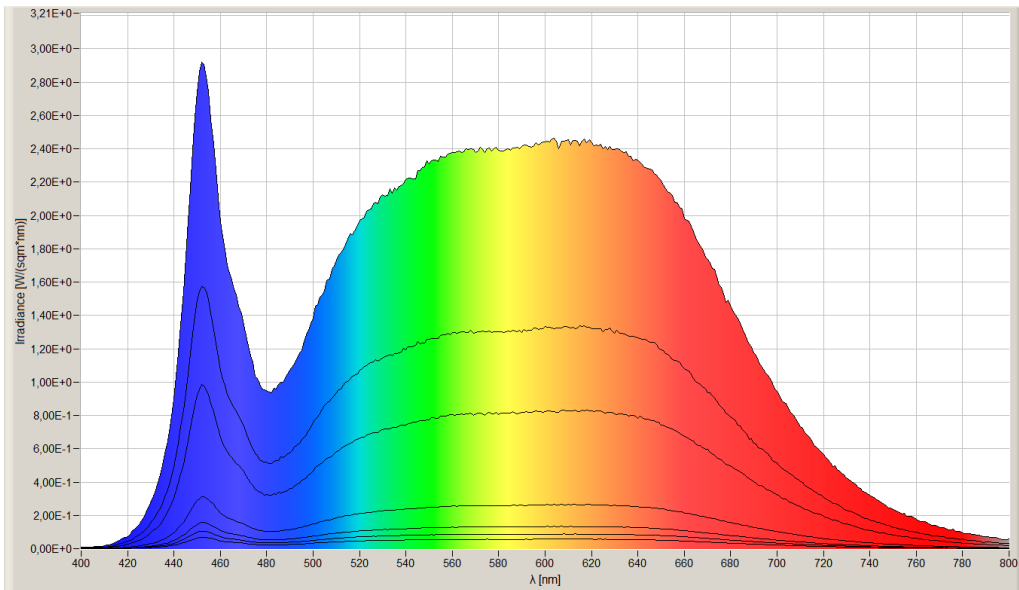

While LuxaLight has made every reasonable effort to ensure the accuracy of the information in this brochure, LuxaLight does not guarantee that it is error - free, nor does LuxaLight make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. LuxaLight reserves the right to make any adjustments to the information contained herein at any time without notice. LuxaLight expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalogue are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult LuxaLight for the latest dimensions and design specifications.