

Datasheet

LuxaLight Industrial LED Fixture Transparent IP68 Blue 450nm 24.2x16mm (24 Volt, 2835, IP68)

LF-24-450-24.2x16-PU

Version: 2025-03-28.1

Product description

The **LuxaLight Industrial LED Fixture** is specifically designed for demanding industrial applications that require high radiation intensity. With a wavelength of **450nm**, this LED fixture provides a reliable and efficient solution for various industrial processes, such as material curing, biological research, and more. The **450nm wavelength** is ideal for applications such as photochemical processes, biological studies, and other specific industrial needs that benefit from blue light.

Key Features:

- **450nm Wavelength:** The **450nm wavelength** is perfect for a range of industrial and scientific applications, including photochemical processes, biological research, and industrial processes where blue light is essential.
- **24V Power Supply:** Powered by a reliable 24V power supply, ensuring stable operation in demanding industrial environments.
- **Fully PU Encapsulated Housing with IP68 and IK10 Protection:** This LED fixture is fully encapsulated in **PU (polyurethane)**, resulting in a robust, waterproof, and dustproof housing with **IP68** protection. This makes it suitable for use in extreme environments, such as outdoor installations or humid spaces. The **IK10** rating provides protection against heavy impacts, ensuring the fixture is highly durable and reliable.
- **Industrial Durability:** This fixture is designed for industrial environments and can withstand the demands of harsh conditions, with resistance to moisture, dust, and mechanical stresses.
- **Real-Time Temperature Monitoring via NTC Sensor:** Integrated with a temperature monitoring system, the fixture ensures continuous temperature regulation, maintaining optimal operating temperatures for consistent and efficient performance.

Applications:

- **Industrial Photochemical Processes:** The **450nm wavelength** is effective for photochemical processes requiring blue light, such as certain chemical production processes or material treatments.
- **Biological and Medical Research:** The fixture supports biological research by promoting cell growth and regeneration, making it valuable for cell cultivation, tissue studies, and medical applications such as photobiomodulation therapy (PBM).
- **Medical Therapy:** Blue light is used in phototherapy treatments for skin healing, muscle recovery, acne treatment, and inflammation reduction.
- **Cosmetic Industry:** The **450nm light** is beneficial for improving skin texture, reducing wrinkles, and promoting collagen production, offering a non-invasive solution for skin treatments.
- **Industrial Material Curing (Non-UV):** The **450nm wavelength** can cure specific materials and coatings that respond to blue light, ensuring faster and more efficient curing processes in industrial production.
- **Food Industry:** Blue light can be used to promote the growth and health of crops in controlled environments and even help preserve certain food products through its effects on microorganisms.
- **Aquaculture:** The **450nm wavelength** is effective in enhancing the health and growth of fish and aquatic plants, making it ideal for aquaculture systems.
- **Water Treatment:** In certain water purification processes, **450nm light** can help activate specific photoreaction mechanisms to break down contaminants.
- **Environmental Monitoring:** The **450nm wavelength** can aid in environmental monitoring by detecting pollutants or promoting the growth of bioindicators in specific ecosystems.
- **Pharmaceutical Manufacturing:** Blue light at **450nm** can be used in the production of pharmaceutical products that require specific light exposure during synthesis or quality control processes.

Benefits:

- **High Radiation Intensity:** With the ability to pulse, the fixture can significantly increase radiation intensity, resulting in faster reaction times and higher productivity in industrial processes.
- **Efficient Temperature Management:** The NTC sensor continuously monitors temperature, ensuring that the fixture remains at optimal levels for peak performance, thus preventing overheating and extending the fixture's lifespan.
- **Industrial Durability:** The fully **PU encapsulated** housing provides **IP68** protection against dust and water, and the **IK10** rating offers resistance to heavy impacts and mechanical damage. This makes the fixture extremely robust and suitable for use in the most demanding environments.
- **Fast and Efficient Performance:** The high efficiency of the **450nm LED** ensures fast processing speeds, ideal for high-throughput industrial applications such as material curing and large-scale production processes.

Technical specifications

General	
Brand	LuxaLight
Application	Machine Vision
LED type	2835
Material	Aluminum
Dimensions	220 × 24,2 × 16 mm
Mounting	Surface mounted
Cover type	Polyurethane
LEDs per piece	108.00

Lighting																	
Wave length	450																
Light intensity	<table border="1"> <thead> <tr> <th>Value</th> <th>Measuring distance</th> </tr> </thead> <tbody> <tr> <td>25 lx</td> <td>50 mm</td> </tr> <tr> <td>13,4 lx</td> <td>75 mm</td> </tr> <tr> <td>8,9 lx</td> <td>100 mm</td> </tr> <tr> <td>2,8 lx</td> <td>200 mm</td> </tr> <tr> <td>1,4 lx</td> <td>300 mm</td> </tr> <tr> <td>0,9 lx</td> <td>400 mm</td> </tr> <tr> <td>0,6 lx</td> <td>600 mm</td> </tr> </tbody> </table>	Value	Measuring distance	25 lx	50 mm	13,4 lx	75 mm	8,9 lx	100 mm	2,8 lx	200 mm	1,4 lx	300 mm	0,9 lx	400 mm	0,6 lx	600 mm
	Value	Measuring distance															
	25 lx	50 mm															
	13,4 lx	75 mm															
	8,9 lx	100 mm															
	2,8 lx	200 mm															
	1,4 lx	300 mm															
	0,9 lx	400 mm															
0,6 lx	600 mm																
Beam angle	120 °																

Measurement results																	
PPFD	<table border="1"> <thead> <tr> <th>Value</th> <th>Measuring distance</th> </tr> </thead> <tbody> <tr> <td>2495 µmol/m2</td> <td>50 mm</td> </tr> <tr> <td>1293 µmol/m2</td> <td>75 mm</td> </tr> <tr> <td>849 µmol/m2</td> <td>100 mm</td> </tr> <tr> <td>263 µmol/m2</td> <td>200 mm</td> </tr> <tr> <td>129 µmol/m2</td> <td>300 mm</td> </tr> <tr> <td>87,4 µmol/m2</td> <td>400 mm</td> </tr> <tr> <td>60,5 µmol/m2</td> <td>600 mm</td> </tr> </tbody> </table>	Value	Measuring distance	2495 µmol/m2	50 mm	1293 µmol/m2	75 mm	849 µmol/m2	100 mm	263 µmol/m2	200 mm	129 µmol/m2	300 mm	87,4 µmol/m2	400 mm	60,5 µmol/m2	600 mm
	Value	Measuring distance															
	2495 µmol/m2	50 mm															
	1293 µmol/m2	75 mm															
	849 µmol/m2	100 mm															
	263 µmol/m2	200 mm															
	129 µmol/m2	300 mm															
	87,4 µmol/m2	400 mm															
60,5 µmol/m2	600 mm																
Irradiance	<table border="1"> <thead> <tr> <th>Value</th> <th>Measuring distance</th> </tr> </thead> <tbody> <tr> <td>662 W/m2</td> <td>50 mm</td> </tr> <tr> <td>355 W/m2</td> <td>75 mm</td> </tr> <tr> <td>234 W/m2</td> <td>100 mm</td> </tr> <tr> <td>72,2 W/m2</td> <td>200 mm</td> </tr> <tr> <td>35,4 W/m2</td> <td>300 mm</td> </tr> <tr> <td>23,6 W/m2</td> <td>400 mm</td> </tr> <tr> <td>16,3 W/m2</td> <td>600 mm</td> </tr> </tbody> </table>	Value	Measuring distance	662 W/m2	50 mm	355 W/m2	75 mm	234 W/m2	100 mm	72,2 W/m2	200 mm	35,4 W/m2	300 mm	23,6 W/m2	400 mm	16,3 W/m2	600 mm
	Value	Measuring distance															
	662 W/m2	50 mm															
	355 W/m2	75 mm															
	234 W/m2	100 mm															
	72,2 W/m2	200 mm															
	35,4 W/m2	300 mm															
	23,6 W/m2	400 mm															
16,3 W/m2	600 mm																

- By combining Pulse Mode with Real-Time Monitoring, the efficiency of LED systems can be increased, resulting in higher output.
- We have the expertise and equipment to perform measurements tailored to the specific requirements of the application.

Electronics

Working voltage	24V										
Current per piece	1.25 A / piece										
Power consumption per piece	30.00 W / piece										
PCB material	Aluminium										
Pinout	<table border="1"> <thead> <tr> <th>Symbol</th> <th>Function</th> </tr> </thead> <tbody> <tr> <td>V+</td> <td>V+</td> </tr> <tr> <td>GND</td> <td>Ground</td> </tr> <tr> <td>NTC</td> <td>NTC sensor</td> </tr> <tr> <td>NTC_GND</td> <td>NTC ground</td> </tr> </tbody> </table>	Symbol	Function	V+	V+	GND	Ground	NTC	NTC sensor	NTC_GND	NTC ground
Symbol	Function										
V+	V+										
GND	Ground										
NTC	NTC sensor										
NTC_GND	NTC ground										
NTC parameters	Resistance: 5000 Ohm Beta value: 3950										



Environmental

Operating temperature	-20 ~ +60 °C
Storage temperature	-40 ~ +80 °C
IP class	IP 68

Directives - standards - certificates

Directives	RoHS CE
Safety standards	EN60598-1 EN62031 IEC62471

Measurement results

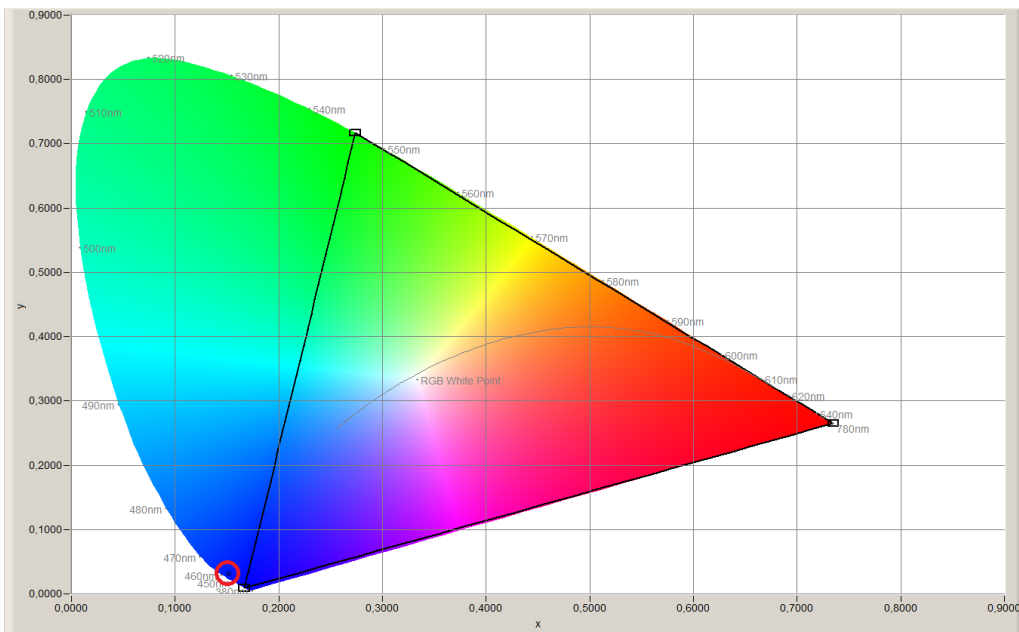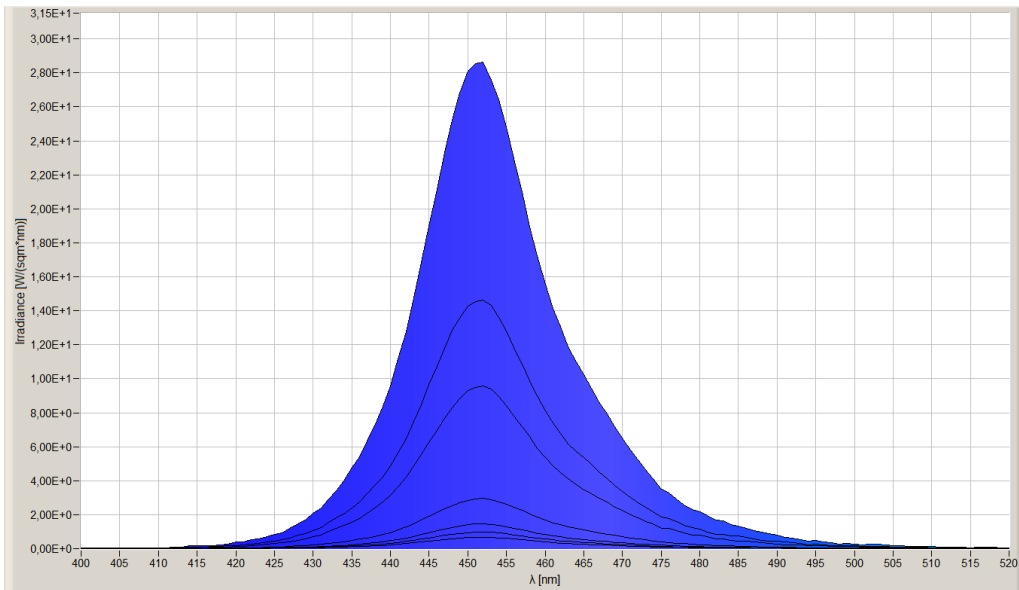

While LuxaLight has made every reasonable effort to ensure the accuracy of the information in this brochure, LuxaLight does not guarantee that it is error - free, nor does LuxaLight make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. LuxaLight reserves the right to make any adjustments to the information contained herein at any time without notice. LuxaLight expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalogue are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult LuxaLight for the latest dimensions and design specifications.