

# Datasheet

## **LuxaLight Industrial LED Fixture Transparent cover White Full Spectrum 5700K 24.2x16mm (24 Volt, 2835, IP64)**

**LF-24-5700-24.2X16-TC**

**Version: 2025-03-28.1**

## Product description

The **LuxaLight Industrial LED Fixture (5700K)** is designed as a high-quality component for industrial applications that require high lumen output, precision, and exceptional color accuracy. With a **CRI of 95+** and a 5700K color temperature, this LED-**fixture** provides an ideal solution for applications such as **food inspection (Agro-Food)**, **hyper-spectral imaging**, **line scan cameras**, and **machine vision systems**, where accurate color rendering and consistent light output are crucial.

This LED-**fixture** can be easily integrated into custom fixtures or housings based on your specific requirements. Its versatility makes it perfect for use in various industrial, research, and inspection environments where high-quality illumination is necessary for detailed analysis and accurate measurements.

### Key Features:

- **5700K Color Temperature:** The 5700K natural white light provides clarity and excellent color accuracy, making it ideal for tasks like food inspection, hyper-spectral imaging, and machine vision systems where precise and clear lighting is essential.
- **CRI 95+:** With a Color Rendering Index (CRI) of 95 or higher, the LED-**fixture** ensures excellent color accuracy and true-to-life color rendering, which is critical for applications requiring accurate color differentiation, such as in food quality control and material inspection.
- **High Lumen Output:** This LED-**fixture** delivers a high lumen output, providing bright and even illumination, essential for imaging applications where clarity and precision are key.
- **Modular Design with Aluminum Heatsink and Transparent Cover:** The modular design, combined with the aluminum heatsink and transparent cover, ensures optimal heat management and mechanical strength, enhancing the durability and reliability of the LED-**fixture**. This makes it suitable for applications that require stability and long-term performance.
- **Integration with MaNima Pollux Industry Pulsing (Strobing):** The LED-**fixture** integrates seamlessly with the MaNima Pollux Industry System, enabling high-speed pulsing (strobing) for quick exposures. This feature is ideal for high-speed imaging, allowing for fast reaction times and precise control over exposure.
- **Real-Time Temperature Monitoring via NTC Sensor:** The integrated NTC sensor ensures continuous temperature measurement and adjustment, maintaining optimal operating conditions and preventing overheating.

### Applications:

- **Food Inspection (Agro-Food):** The 5700K color temperature and high CRI ensure optimal color rendering, making it ideal for food inspection, where accurate color representation is necessary for defect detection and quality control.
- **Hyper-Spectral Imaging:** The LED-**fixture** with high CRI and lumen output is perfect for hyper-spectral imaging systems, offering clear and consistent illumination for spectral analysis of materials and substances.
- **Line Scan Cameras:** Ideal for use with line scan cameras, the high lumen output and precise color rendering ensure bright, even illumination, crucial for capturing clear, high-quality images of moving objects or surfaces in high-speed scanning applications.
- **Machine Vision Systems:** The **fixture**'s high CRI and bright illumination provide the ideal lighting for machine vision applications, enabling accurate defect detection, object recognition, and automated quality control in manufacturing and industrial automation.

### Benefits:

- **High CRI for Accurate Color Rendering:** The LED-**fixture**'s CRI of 95+ guarantees exceptional color accuracy, making it ideal for applications where precise color differentiation is essential for quality control and analysis.
- **High Lumen Output:** The **fixture**'s high lumen output provides bright and uniform lighting, improving clarity and enhancing the precision of image and video capture in inspection and imaging applications.
- **Fast Exposures with MaNima Pollux Integration:** Thanks to the integration with the MaNima Pollux Industry System for strobing, the **fixture** enables rapid exposures, facilitating high-speed imaging and faster processing in real-time applications.
- **Flexibility in Integration:** The LED-**fixture** can be easily integrated into custom enclosures or systems, offering flexibility for a wide range of applications, including food inspection, imaging, and machine vision.
- **Efficient Performance:** With consistent, high-quality light output and precise color rendering, the LED-**fixture** offers reliable performance, even in demanding environments that require accurate, high-speed processing.
- **Real-Time Temperature Monitoring for Consistent Performance:** The integrated NTC sensor, combined with the MaNima Pollux Industry System, ensures continuous temperature monitoring, preventing overheating and maintaining optimal performance over time.

## Technical specifications

### General

Brand	LuxaLight
Application	Food Inspection (Agro-Food) Hyper - spectral Imaging Line Scan Cameras Machine Vision
LED type	2835
Material	Aluminum
Dimensions	220 × 24,2 × 16 mm
Mounting	Surface mounted
Warranty	5 years
Cover type	PMMA transparent
LEDs per piece	108.00
Lifetime	70000 hours

### Lighting

Color temperature	5700 ~ 5900 K
CRI	≥ 95
Luminous Flux	3720 lm
BIN	3 SDCM
Beam angle	120 °
LB waarde	L80B50

### Measurement results

PPFD	Value	Measuring distance
	3157 µmol/m2	50 mm
1663 µmol/m2	75 mm	
1082 µmol/m2	100 mm	
350 µmol/m2	200 mm	
169 µmol/m2	300 mm	
116 µmol/m2	400 mm	
74,4 µmol/m2	600 mm	

Irradiance	Value	Measuring distance
	718 W/m2	50 mm
378 W/m2	75 mm	
246 W/m2	100 mm	
80 W/m2	200 mm	
38 W/m2	300 mm	
26 W/m2	400 mm	
17 W/m2	600 mm	

Illuminance

Value	Measuring distance
203 klux	50 mm
107 klux	75 mm
69 klux	100 mm
22 klux	200 mm
11 klux	300 mm
7,5 klux	400 mm
4,8 klux	600 mm

- By combining Pulse Mode with Real-Time Monitoring, the efficiency of LED systems can be increased, resulting in higher output.
- We have the expertise and equipment to perform measurements tailored to the specific requirements of the application.

**Electronics**

Working voltage	24V
Current per piece	1.25 A / piece
Power consumption per piece	30.00 W / piece
PCB material	Aluminium

Pinout

Symbol	Function
V+	V+
GND	Ground
NTC	NTC sensor
NTC_GND	NTC ground

NTC parameters	Resistance: 5000 Ohm Beta value: 3950
----------------	--



**Environmental**

Operating temperature	-20 ~ +60 °C
Storage temperature	-40 ~ +80 °C
IP class	IP 64

**Directives - standards - certificates**

Directives	RoHS CE
Safety standards	EN60598-1 EN62031 IEC62471

## Measurement results

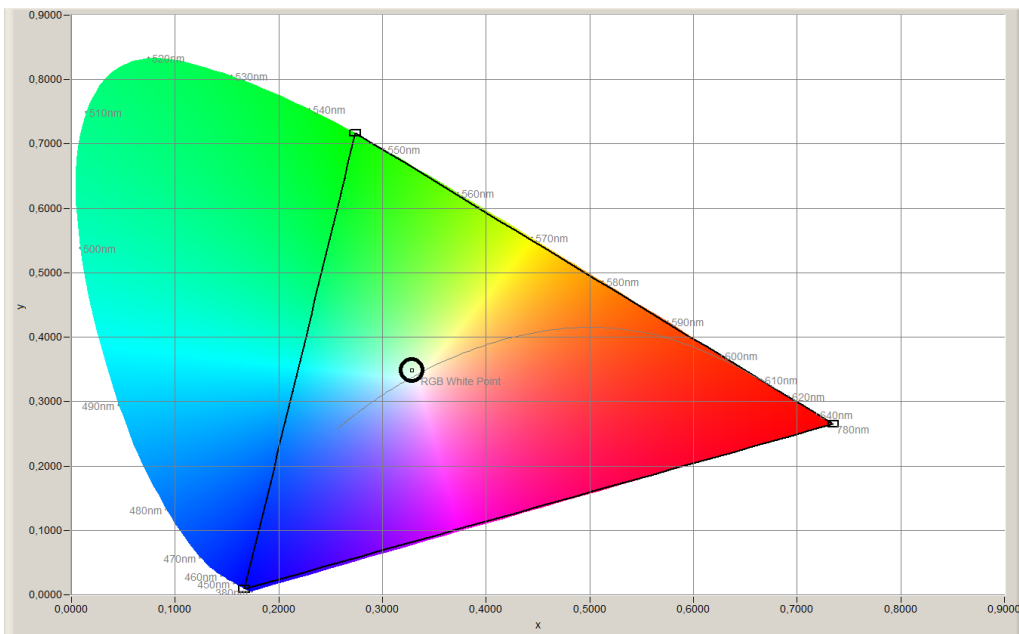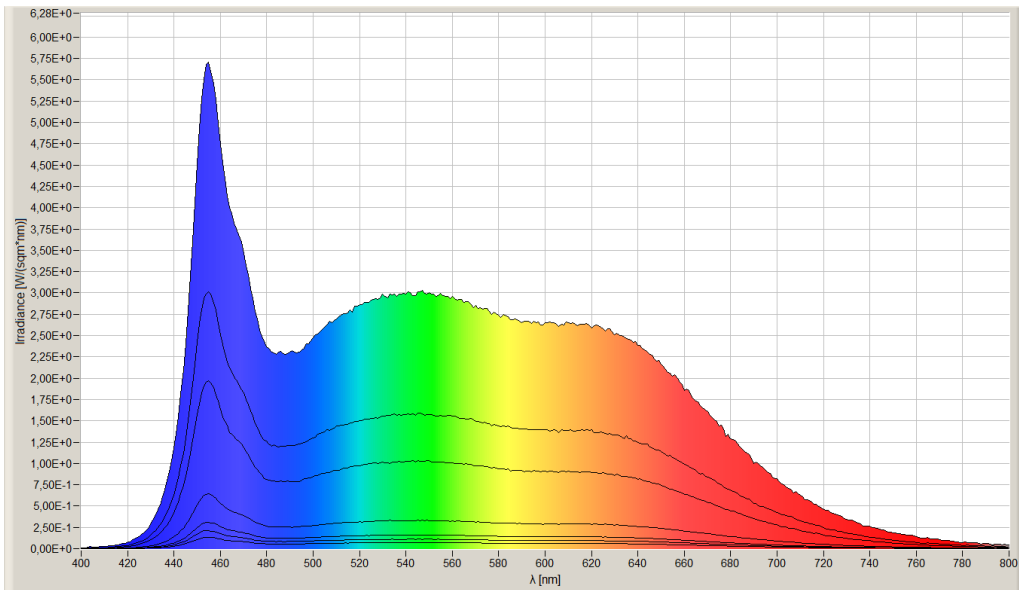

While LuxaLight has made every reasonable effort to ensure the accuracy of the information in this brochure, LuxaLight does not guarantee that it is error - free, nor does LuxaLight make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. LuxaLight reserves the right to make any adjustments to the information contained herein at any time without notice. LuxaLight expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalogue are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult LuxaLight for the latest dimensions and design specifications.