

Datasheet

LuxaLight Industrial LED Fixture Transparent cover Deep Red 660nm 24.2x16mm (24 Volt, 2835, IP64)

LF-24-660-24.2X16-TC

Version: 2025-03-28.1

Product description

The LuxaLight Industrial LED Fixture is designed for intensive industrial applications that require high radiation intensity for a wide range of processes, including material curing, biological research, and more. With a wavelength of 660nm, this LED fixture provides a reliable and efficient solution for processes that benefit from deep red light, such as plant growth stimulation, tissue regeneration, and more.

The LED fixture is equipped with a silicone coating on the PCB, offering extra protection against moisture, dust, and other environmental factors. The transparent cover not only protects the fixture from mechanical damage but also allows the 660nm wavelength to pass through effectively for maximum performance and reliability.

Key Features:

- **660nm Wavelength:** The 660nm wavelength is ideal for applications that require deep red light, such as horticulture, biological research, and specific industrial processes.
- **24V Power Supply:** The fixture operates on a reliable 24V power supply, ensuring stable and consistent operation, perfect for demanding industrial applications.
- **Silicone Coating on PCB:** The PCB is coated with silicone to protect against environmental factors like moisture and dust, ensuring durability in harsh industrial environments.
- **Transparent Cover with Mechanical Protection:** The cover provides mechanical protection against physical damage while allowing the 660nm wavelength to pass through effectively, ensuring maximum performance and reliability.
- **Integration with MaNima Pollux Industry Pulsing (Strobing):** The LED fixture supports integration with the MaNima Pollux Industry System for pulsing (strobing), significantly increasing radiation intensity. This feature allows for faster reactions and improved efficiency in industrial processes.
- **Real-Time Temperature Monitoring via NTC Sensor:** The integrated NTC sensor ensures continuous temperature measurement and adjustment through the MaNima Pollux Industry System. This maintains the optimal operating temperature for maximum radiation output and consistent performance.

Applications:

- **Horticulture & Agriculture:** The 660nm wavelength is highly effective in stimulating plant growth, making it ideal for greenhouse environments and other agricultural applications where plant health and growth are critical.
- **Biological Research:** In scientific and medical fields, 660nm light can be used for applications such as promoting tissue regeneration, cell cultivation, and photobiomodulation therapy (PBM), which can aid in pain reduction and wound healing.
- **Medical Therapy:** 660nm light is used in phototherapy treatments, including skin healing, anti-aging treatments, and muscle recovery, leveraging the benefits of red light to stimulate cells and tissues.
- **Food Industry:** The 660nm wavelength can be used for applications such as the stimulation of growth in food production environments or in the pasteurization process of certain food products.
- **Industrial Material Curing (Non-UV):** The deep red light is used for curing certain types of coatings and materials that respond to red wavelengths, ensuring effective and rapid curing processes in industrial settings.
- **Cosmetic Industry:** The fixture is ideal for applications in the cosmetic industry, where red light is used for skin treatments such as reducing wrinkles, improving skin tone, and promoting collagen production.

Benefits:

- **High Radiation Intensity:** The ability to pulse with the MaNima Pollux Industry System allows radiation intensity to be significantly increased, resulting in faster reactions and increased productivity.
- **Real-Time Temperature Monitoring for Consistent Performance:** The NTC sensor, combined with the MaNima Pollux Industry System, ensures continuous temperature measurement, helping to maintain the optimal operating temperature and preventing overheating, which prolongs the LED's lifespan and improves efficiency.
- **Industrial Durability:** The silicone coating on the PCB provides extra protection against dust, moisture, and other environmental factors, making the fixture resistant to the challenges of heavy industrial environments.
- **Efficiency and Speed:** The LED fixture provides sufficient power for fast and efficient performance, which is essential for industrial production systems that need to process or cure large volumes of material quickly.

Technical specifications

| General | |
|----------------|------------------------------------|
| Brand | LuxaLight |
| Application | Barcode Scanning Machine Vision |
| LED type | 2835 |
| Material | Aluminum |
| Dimensions | 220 × 24,2 × 16 mm |
| Mounting | Surface mounted |
| Warranty | 5 years |
| Cover type | PMMA transparent |
| LEDs per piece | 108.00 |
| Lifetime | 70000 hours |

| Lighting | |
|-------------|--------|
| Wave length | 660 nm |
| Beam angle | 120 ° |
| LB waarde | L80B50 |

Measurement results

| PPFD | Value | Measuring distance |
|--------------------------|--------------------------|--------------------|
| | 3208 µmol/m ² | 50 mm |
| 1500 µmol/m ² | 75 mm | |
| 1010 µmol/m ² | 100 mm | |
| 305 µmol/m ² | 200 mm | |
| 154 µmol/m ² | 300 mm | |
| 92 µmol/m ² | 400 mm | |
| 62 µmol/m ² | 600 mm | |

| Irradiance | Value | Measuring distance |
|------------------------|----------------------|--------------------|
| | 594 W/m ² | 50 mm |
| 277,8 W/m ² | 75 mm | |
| 196,7 W/m ² | 100 mm | |
| 59 W/m ² | 200 mm | |
| 29,9 W/m ² | 300 mm | |
| 19 W/m ² | 400 mm | |
| 11,8 W/m ² | 600 mm | |

Illuminance

| Value | Measuring distance |
|-----------|--------------------|
| 38,5 klux | 50 mm |
| 18 klux | 75 mm |
| 12,3 klux | 100 mm |
| 3,7 klux | 200 mm |
| 1,9 klux | 300 mm |
| 1,2 klux | 400 mm |
| 0,8 klux | 600 mm |

- By combining Pulse Mode with Real-Time Monitoring, the efficiency of LED systems can be increased, resulting in higher output.
- We have the expertise and equipment to perform measurements tailored to the specific requirements of the application.

Electronics

| | |
|-----------------------------|-----------------|
| Working voltage | 24V |
| Current per piece | 1.25 A / piece |
| Power consumption per piece | 30.00 W / piece |
| PCB material | Aluminium |

Pinout

| Symbol | Function |
|---------|------------|
| V+ | V+ |
| GND | Ground |
| NTC | NTC sensor |
| NTC_GND | NTC ground |

| | |
|----------------|--|
| NTC parameters | Resistance: 5000 Ohm Beta value: 3950 |
|----------------|--|



Environmental

| | |
|-----------------------|--------------|
| Operating temperature | -20 ~ +60 °C |
| Storage temperature | -40 ~ +80 °C |
| IP class | IP 64 |

Directives - standards - certificates

| | |
|------------------|----------------------------------|
| Directives | RoHS CE |
| Safety standards | EN60598-1 EN62031 IEC62471 |

Measurement results

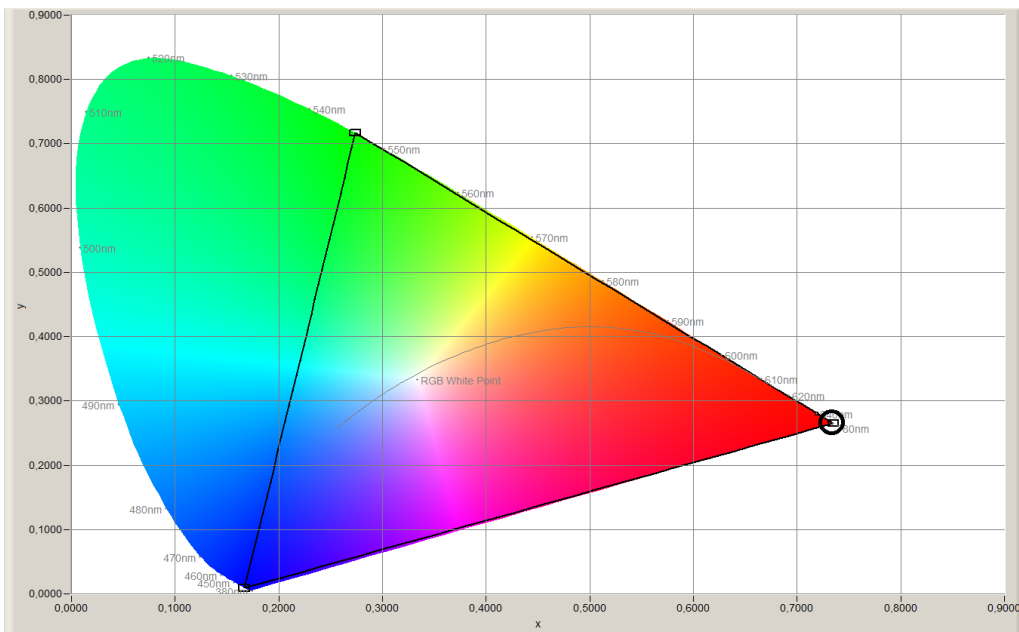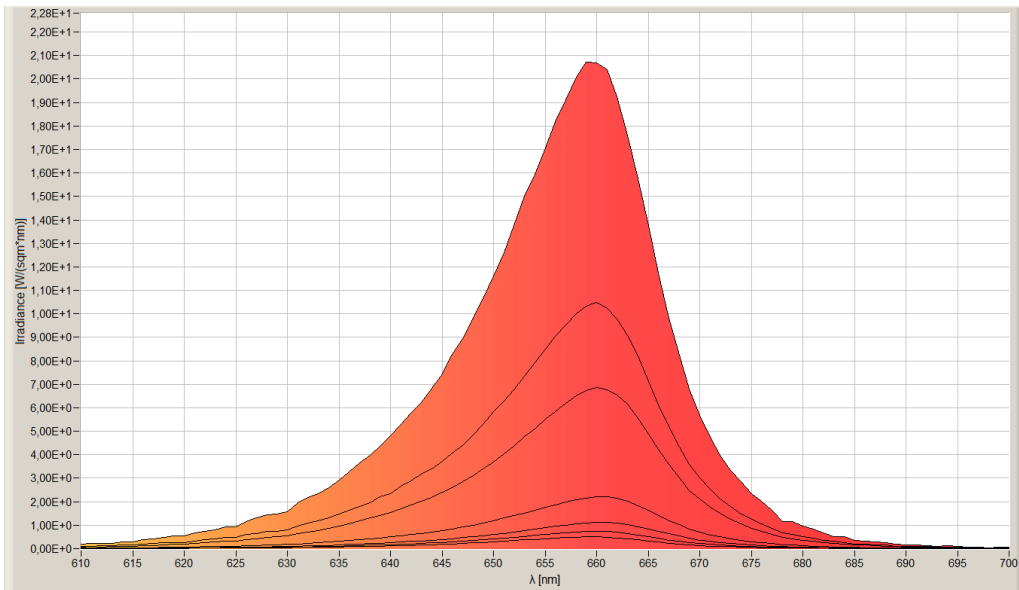

While LuxaLight has made every reasonable effort to ensure the accuracy of the information in this brochure, LuxaLight does not guarantee that it is error - free, nor does LuxaLight make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. LuxaLight reserves the right to make any adjustments to the information contained herein at any time without notice. LuxaLight expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalogue are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult LuxaLight for the latest dimensions and design specifications.