

Datasheet

LuxaLight Industrial LED Fixture Transparent cover Neutral White Full Spectrum 4200K 24.2x16mm (24 Volt, 2835, IP64)

LF-24-4200-24.2X16-TC

Version: 2025-03-28.1

Product description

The LuxaLight Industrial LED Engine (4200K) is a high-quality fixture, specially designed for applications requiring high light output, precision, and excellent color rendering. The fixture is made from durable aluminum, which not only ensures a robust and reliable construction but also provides excellent *heat management* performance. The design is optimized to prevent overheating and maximize efficiency. The transparent cover offers additional mechanical protection, enhancing the durability of the unit, even in demanding environments.

Key Features:

- **4200K Color Temperature:** The neutral white light at 4200K provides a balanced spectrum, with a strong focus on the 650 nm and 675 nm wavelengths for red light, essential for photosynthesis and plant growth. The LED engine also has a high peak at 450 nm, ideal for promoting chlorophyll production and other biological processes.
- **High PAR Flux (2726 $\mu\text{mol}/\text{m}^2/\text{s}$ at 5 cm):** The LED engine delivers high light intensity in the form of PAR, ideal for promoting photosynthesis and plant growth. This makes it an excellent choice for horticulture and other applications requiring intense light.
- **Aluminum Fixture for Optimal Heat Management:** The fixture is made from high-quality aluminum, which ensures efficient heat dissipation and optimizes the performance of the LED engine. This helps prevent overheating, ensuring the product operates at its best at all times.
- **Transparent Cover for Mechanical Protection:** The sturdy, transparent cover provides additional protection against physical damage, making the fixture suitable for use in various industrial and horticultural environments.
- **Easy Integration:** The LED engine is designed for easy integration into existing systems or enclosures, providing flexibility for a wide range of horticultural and light-related applications.
- **Real-Time Temperature Monitoring via NTC Sensor:** The integrated NTC sensor continuously measures and adjusts temperature, maintaining optimal operating conditions. This prevents overheating and ensures the LED engine always performs at its best, maximizing output for consistent and long-lasting results.

Applications:

- **Horticulture and Plant Lighting:** The 4200K color temperature and high PAR flux make this LED engine ideal for horticultural applications, where a broad spectrum of light is necessary to promote photosynthesis, with a strong focus on 650 nm and 675 nm for red light and a peak at 450 nm for blue light. This makes it perfect for applications such as growing facilities, vertical farming, and commercial cultivation.
- **Plant Research and Growth Optimization:** With its balanced light spectrum, including specific wavelengths of 650 nm, 675 nm, and 450 nm, the LED engine is ideal for scientific research on plant growth, photosynthesis, and other biological processes influenced by light intensity and quality.
- **Growing Facilities and Vertical Farming:** The LED engine provides powerful lighting for controlled growing environments in greenhouses, vertical farming, and other indoor growing applications, where specific light spectrums and high PAR flux are essential for maximum yield and plant health.
- **Plant and Product Quality Control:** The LED engine is also suitable for quality control of plants, crops, or other biological products in agriculture and horticulture, providing consistent lighting that accurately simulates growth conditions.

Benefits:

- **Full Spectrum with High Peaks at 450 nm and Red Light (650 nm & 675 nm):** The extensive light spectrum, with specific wavelengths for blue light (450 nm) and red light (650 nm & 675 nm), offers powerful lighting for photosynthesis and plant growth.
- **High PAR Flux:** The high PAR flux of 2726 $\mu\text{mol}/\text{m}^2/\text{s}$ at 5 cm ensures sufficient light intensity, essential for promoting healthy plant growth, especially in commercial growing environments.
- **Integration Flexibility:** The LED engine can be easily integrated into existing systems or enclosures, providing flexibility for applications in greenhouses, vertical farming, and other horticulture-related setups.
- **Efficient Performance:** The LED engine offers reliable and efficient performance with consistent light output, making it ideal for intensive growth applications, such as horticulture, where long-lasting and dependable lighting is required.
- **Real-Time Temperature Monitoring for Consistent Performance:** The integrated NTC sensor ensures continuous temperature monitoring, preventing overheating and maintaining optimal performance over time. This contributes to maximizing the LED engine's yield, which is crucial for maintaining high performance in a dynamic environment.

Technical specifications

General	
Brand	LuxaLight
Application	Food Inspection (Agro-Food) Hyper - spectral Imaging Line Scan Cameras Machine Vision
LED type	2835
Material	Aluminum
Dimensions	220 × 24,2 × 16 mm
Mounting	Surface mounted
Warranty	5 years
Cover type	PMMA transparent
LEDs per piece	108.00
Lifetime	70000 hours

Lighting	
Color temperature	4200 K
CRI	≥ 95
Luminous Flux	3720 lm
BIN	3 SDCM
Beam angle	120 °
LB waarde	L80B50

Measurement results

PPFD	Value	Measuring distance
	3459 µmol/m2	50 mm
1758 µmol/m2	75 mm	
1150 µmol/m2	100 mm	
357 µmol/m2	200 mm	
191 µmol/m2	300 mm	
123 µmol/m2	400 mm	
80,4 µmol/m2	600 mm	

Irradiance	Value	Measuring distance
	778 W/m2	50 mm
396 W/m2	75 mm	
259 W/m2	100 mm	
80 W/m2	200 mm	
43 W/m2	300 mm	
28 W/m2	400 mm	
18 W/m2	600 mm	

Illuminance

Value	Measuring distance
226 klux	50 mm
115 klux	75 mm
75 klux	100 mm
23 klux	200 mm
13 klux	300 mm
8,1 klux	400 mm
5,3 klux	600 mm

- By combining Pulse Mode with Real-Time Monitoring, the efficiency of LED systems can be increased, resulting in higher output.
- We have the expertise and equipment to perform measurements tailored to the specific requirements of the application.

Electronics

Working voltage	24V
Current per piece	1.25 A / piece
Power consumption per piece	30.00 W / piece
PCB material	Aluminium

Pinout

Symbol	Function
V+	V+
GND	Ground
NTC	NTC sensor
NTC_GND	NTC ground

NTC parameters	Resistance: 5000 Ohm Beta value: 3950
----------------	--



Environmental

Operating temperature	-20 ~ +60 °C
Storage temperature	-40 ~ +80 °C
IP class	IP 64

Directives - standards - certificates

Directives	RoHS CE
Safety standards	EN60598-1 EN62031 IEC62471

Measurement results

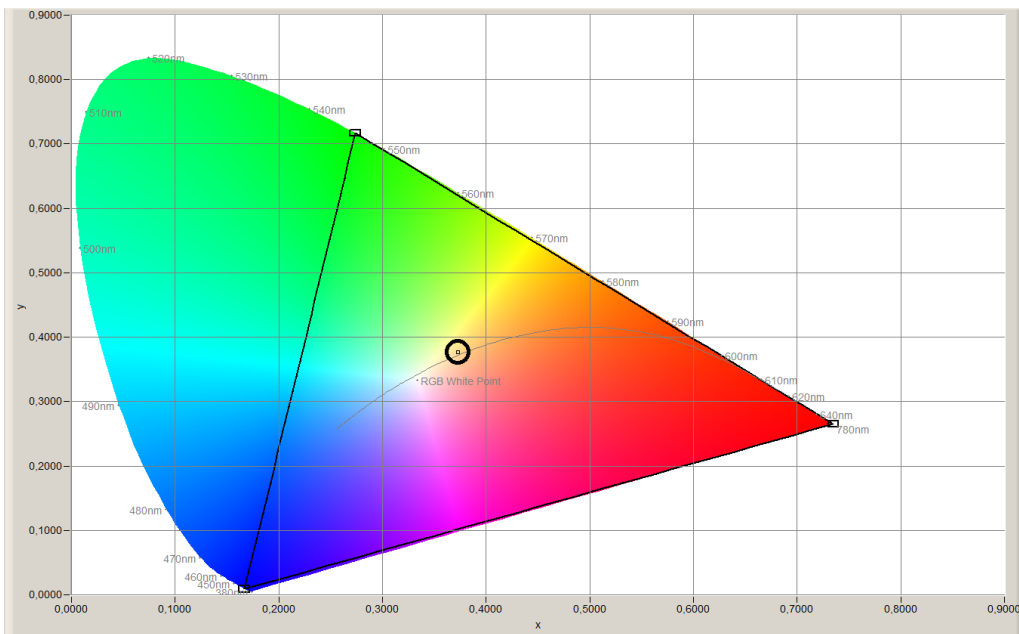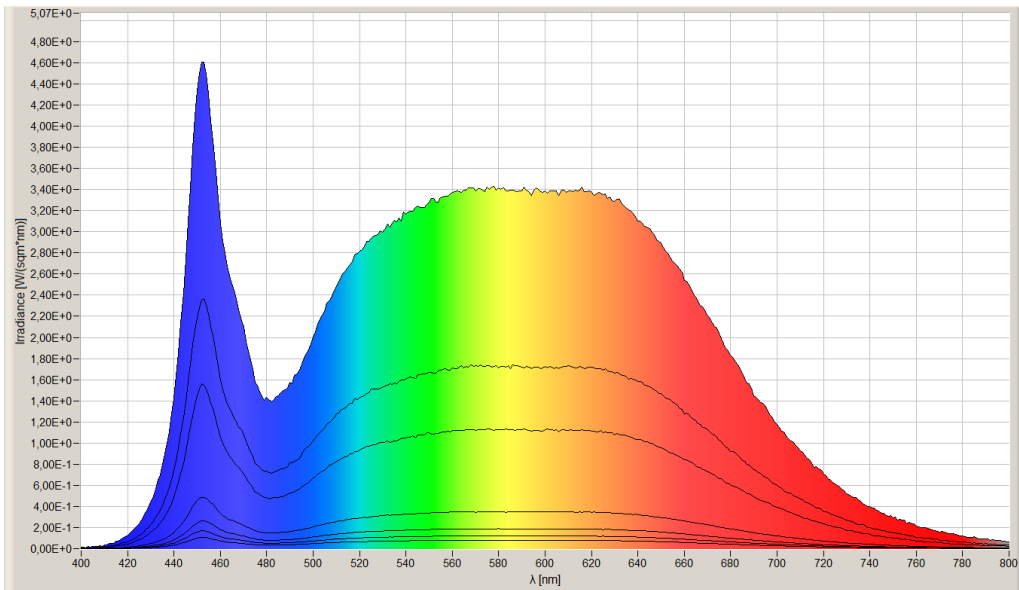

While LuxaLight has made every reasonable effort to ensure the accuracy of the information in this brochure, LuxaLight does not guarantee that it is error - free, nor does LuxaLight make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. LuxaLight reserves the right to make any adjustments to the information contained herein at any time without notice. LuxaLight expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalogue are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult LuxaLight for the latest dimensions and design specifications.